

FLEX TEST LOAD FRAM

101-C0064-201

Standard: EN1 2390-5, ASTM C78 & C293

MatCivTest

MATERIAL CIVIL TEST EQUIPMENT


101-C0064-201

Flex Test Load Frame


Flexural frame has been designed to achieved minimum deflection at maximum pressures resulting in very high accuracy. Overall structure are rigid & compact.

Technical Specifications:-

- Max. Capacity: 150 kN
- Roller Size (mm): 30 Dia. x 160mm Lg.
- Max. Vertical Clearance: 165 mm
- Max. Horizontal Clearance: 160 mm
- Max. Piston Travel: 80 mm
- Loading span :100 mm / 150 mm or Single
- Support span : 300 mm / 450 mm
- Frame Dimension: 300 (L) x 340 (W) x 1108(H)
- Approx. Product Weight: 260 kg

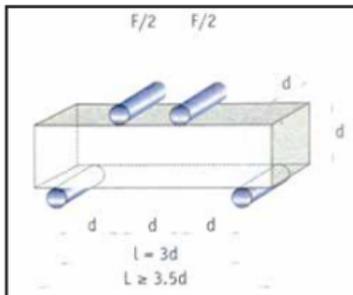

**4 Points Bend Setup
(2 Points Loading)**

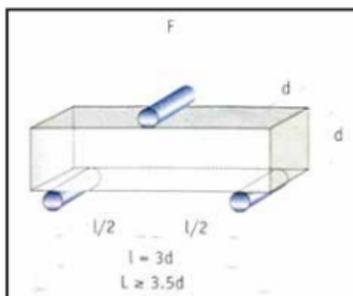

**3 Points Bend Setup
(Centre Point Loading)**

